




G-334
Replacement Link

- Forged Steel - Quenched and Tempered.
- Has larger inside dimensions making it easier to attach hooks or other fittings to the chain
- An exclusive Crosby product.
- After making connections, rivets must be peened.

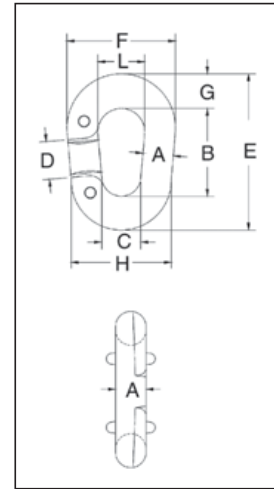

G-334 Pear Shape “Missing Link”® Replacement Links

Chain Size (in)	Stock No. G-334 Galv.	Working Load Limit (lb)*	Weight Per 100 (lb)	Dimensions (in)								
				A	B	C	D	E	F	G	H	L
3/8	1013432	1850	25.00	.41	2.00	.56	.81	2.94	1.63	.47	1.38	.81
1/2	1013450	3300	50.00	.50	2.50	.69	1.00	3.63	2.00	.56	1.69	1.00
5/8	1013478	5000	75.00	.63	2.75	.81	1.06	4.00	2.38	.63	2.06	1.13
3/4	1013496	7100	125.00	.75	3.13	1.00	1.13	4.75	2.75	.81	2.50	1.25
7/8	1013511	9600	200.00	.88	3.69	1.25	1.38	5.56	3.25	.94	3.00	1.50


* Ultimate Load is 4 times the Working Load Limit. ** Rivets Only - No interlocking lugs. † Has reinforced rivet holes. All sizes have countersunk rivet holes.
Not Suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.



G-335
Replacement Link

- Forged Steel - Quenched and Tempered.
- Integral rivets join the two halves.
- After making connections, rivets must be peened.

Meets or exceeds the performance requirements of Federal Specifications RR-C-271G, type II, except for those provisions required of the contractor. For additional information, see page 452.

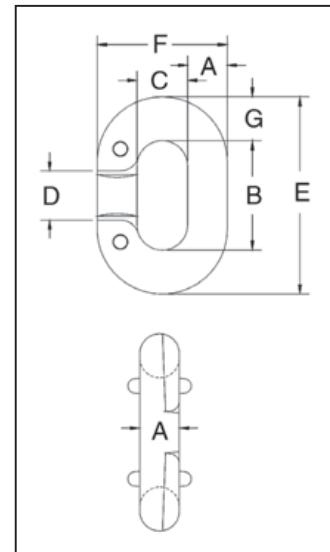

G-335 “Missing Link”® Replacement Links

Chain Size (in)	Stock No. G-335 Galv.	Working Load Limit (lb)*	Links Per Box	Weight Per 100 (lb)	Dimensions (in)						
					A	B	C	D	E	F	G
**1/4	1013110	1325	10	6.25	.28	.88	.44	.44	1.50	1.00	.31
**5/16	1013138	1950	10	12.50	.34	.94	.47	.47	1.69	1.16	.38
3/8	1013156	2750	10	20.00	.41	1.13	.56	.56	2.06	1.38	.47
7/16	1013174	3625	10	27.50	.47	1.28	.59	.59	2.34	1.53	.53
1/2	1013192	4750	10	37.50	.53	1.47	.66	.66	2.66	1.72	.59
5/8	1013236	7250	10	72.50	.66	1.81	.78	.81	3.31	2.09	.75
3/4	1013254	10250	10	122.50	.78	2.13	.94	1.06	3.88	2.50	.88
7/8	1013272	12000	Bulk	175.00	.91	2.50	1.13	1.13	4.50	2.94	1.00
† 1	1013290	15500	Bulk	250.00	1.03	2.75	1.25	1.25	5.00	3.31	1.13

* Ultimate Load is 4 times the Working Load Limit. ** Rivets Only - No interlocking lugs. † Has reinforced rivet holes. All sizes have countersunk rivet holes.
Not Suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.