

380 SERIES EASY REEVE® HOOK BLOCKS

- Wide range of products available.
 - Capacity: 5 to 80 Tons - Larger Models Available.
 - Sheave Sizes: 10" to 20".
 - Wireline Sizes: 7/16" to 1-1/4".
- All single point shank hooks are genuine Crosby®, forged alloy steel, Quenched and Tempered, and have the patented **QUIC-CHECK®** markings (Duplex hooks are available on most sizes).
- Design factor of 4:1 (unless otherwise noted).
- All Easy Reeve® Blocks are furnished standard with Roller Bearings.
- Reeving Guides Standard – All Models.
- Blocks thru 25 Tons use 319N hooks with S-4320 latches.
- Heavy Duty Positive Locking (PL) Latch – Models: 30 Tons and larger.
- Sheave lubrication through center pin - separate lube channel to each bearing.
- Sheaves fully protected by side plates.
- Dual action hook (swings and rotates).
- Repair parts available through worldwide distribution network.
- All Easy Reeve® blocks 16" and larger are furnished with McKissick® Roll-Forged sheaves with flame hardened grooves.
- Manufactured by an ISO 9001 and API Q1 certified facility .
- "Look for the Orange Hook . . . the mark of genuine McKissick® quality".



OPTIONS AVAILABLE

- Duplex Hooks
- Swivel Tee and Shackle Assemblies
- Sheave Shrouds
- Anti-Rotation Hook-Locking Device
- Plate Steel Cheek Weights
- Third party testing with Certification available upon request

Center "Dead End" to promote better block travel under various reeving configurations

Sheave Guards
that open to allow block reeving without removing the rope end fitting




The patented McKissick Split-Nut® is the standard retention system for standard crane blocks up to 100 Tons.

For custom orders contact our Block Hotline at: (800)727-1555, or reference the special request form on page 454.



Flat Bottom
side plate for self standing during reeving process.

*Forged Crosby® alloy steel hooks with patented **QUIC-CHECK®** markings and Heavy Duty positive locking hook latch.*

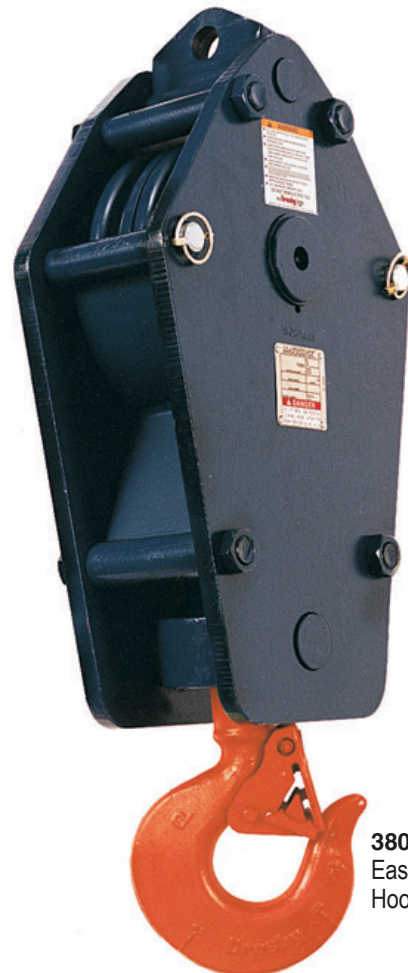

380 Series
Easy Reeve®
Hook Block

The patented McKissick Split-Nut® is the standard retention system for standard crane blocks up to 100 Tons.