







TU-481

- **Wide Range of Sizes Available:**
 - 30 and 60 Ton Capacity
 - 1" to 2-1/4" Wireline Size
 - 16" to 24" Sheave Diameter
 - Larger Capacity Blocks available.
- **Multiple Configurations Available:**
 - Swivel Shackle
 - Tailboard
 - Upset Shackle
 - Fixed Shackle
- **McKissick Roll-Forged Sheaves:**
 - Flame Hardened Grooves
 - 30 Ton furnished with Roller Bearings
 - 60 Ton furnished with Tapered Roller Bearings with seals

- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.



All sizes are
RFID EQUIPPED

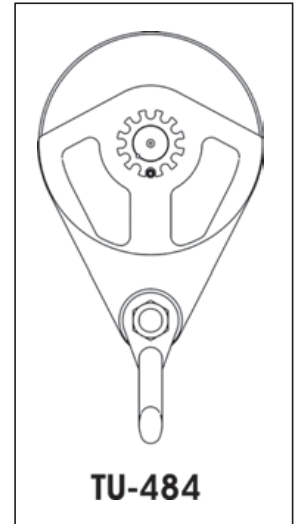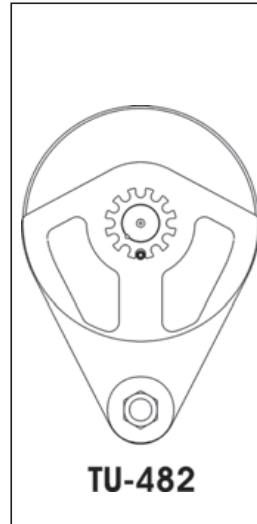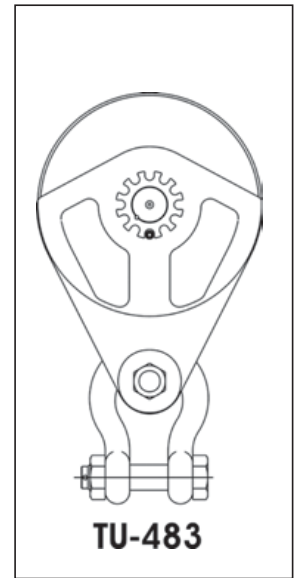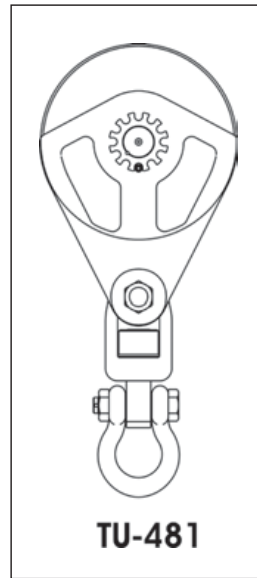

TU-481 / TU-482 / TU-483 / TU-484
High Capacity Snatch Blocks for Tilt-Up Wall Construction

Working Load Limit (Tons)*	Sheave Diameter (in)	Wire Line Size (in)	With Swivel Shackle		Tailboard Style		With Upset Shackle		With Fixed Shackle	
			TU-481 Stock No.	TU-481 Weight Each (lb)	TU-482 Stock No.	TU-482 Weight Each (lb)	TU-483 Stock No.	TU-483 Weight Each (lb)	TU-484 Stock No.	TU-484 Weight Each (lb)
30	16"	1" - 1-1/4"	2108327	235	2108330	140	2108333	180	2108651	160
30	16"	1-1/4" - 1-1/2"	2108351	235	2108354	140	2108357	180	2108657	160
30	20"	1" - 1-1/4"	2108387	250	2108390	155	2108393	195	2108666	175
30	20"	1-1/4" - 1-1/2"	2108411	250	2108414	155	2108417	195	2108672	175
60	18"	1" - 1-1/4"	2108453	390	2108456	230	2108459	340	2108462	290
60	18"	1-1/4" - 1-1/2"	2108483	390	2108486	230	2108489	340	2108492	290
60	24"	1" - 1-1/4"	2108528	450	2108531	290	2108534	400	2108537	350
60	24"	1-1/4" - 1-1/2"	2108558	450	2108561	290	2108564	400	2108567	350
60	24"	1-1/2" - 1-3/4"	2108588	450	2108591	290	2108594	400	2108597	350
60	24"	1-3/4" - 2"	2108618	450	2108621	290	2108624	400	2108627	350
60	24"	2" - 2-1/4"	2108633	450	2108636	290	2108639	400	2108642	350

* Ultimate Load is 4 times the Working Load Limit.

Contact our Block Hotline (800)772-1555 for larger capacity blocks up to 350 Tons or reference the special request form on page 461.