




**IPSBUUZ**

The IPSBU(U)Z shipbuilding clamps are used for the lifting, transfer and placing of complete shipsections. These clamps are fitted with a locking device for both open and closed positions, which ensures complete reliability. They are to be used exclusively for bulb profiles (not for plates).

**For Lifting, Transferring and Placing Complete Shipsections**

- Available in capacities of 4.5 thru 22.50 metric tons.
- Wide variety of jaw openings available: HP 3.94" to HP 16.93".
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (CrosbyIP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Optional IP-5000 Stinger assembly available (see page 428). Allows for easy connection between the clamp and hoist hook.
- Maintenance and repair kits are available.
- Manufactured by an ISO 9001 facility.
- All sizes are **RFID EQUIPPED**.

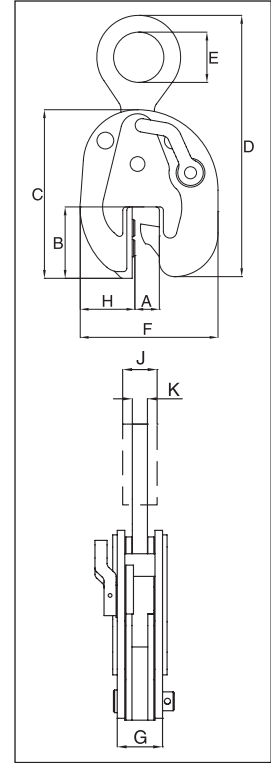

**Model IPSBUUZ and IPSBUSUZ: With Universal Hoisting Eye**  
**Model IPSBUZ and IPSBUSZ: With Fixed Hoisting Eye**

Model	Working Load Limit (t)*	IPSBUUZ Stock No.	Weight Each (lb)	Dimensions (in)									
				Profile A†	B	C	D	E	F	G	H	J	K
IPSBUUZ	4.5	2705771	34.2	HP 4.00 - 6.25	4.21	9.92	17.72	2.95	8.11	3.78	3.23	1.42	0.79
IPSBUUZ	9	2705773	94.8	HP 4.00 - 6.25	4.13	10.79	19.33	3.15	9.76	4.84	4.09	1.73	0.79
IPSBUSUZ	4.5	2705772	83.8	HP 7.13 - 17.00	8.94	16.85	25.00	2.95	14.84	3.74	5.04	-	0.79
IPSBUSUZ	9	2705774	152	HP 7.13 - 17.00	8.94	18.82	28.27	3.15	16.73	4.65	6.10	1.73	0.98
<b>With fixed hoisting eye</b>													
IPSBUZ	4.5	2705721	29.8	HP 4.00 - 6.25	4.21	9.92	15.04	2.95	8.11	3.78	3.23	-	0.79
IPSBUZ	9	2705723	50.7	HP 4.00 - 6.25	4.13	10.79	18.15	3.15	9.76	4.84	4.09	-	1.18
IPSBUSZ	4.5	2705722	78.9	HP 7.13 - 17.00	8.94	16.85	23.31	2.95	14.84	3.74	5.04	-	0.79
IPSBUSZ	9	2705724	150	HP 7.13 - 17.00	8.94	18.82	26.10	3.15	16.73	4.65	6.10	1.77	0.98
IPSBUSZ	15	2705728	141	HP 7.13 - 17.00	8.90	19.09	27.17	3.46	15.79	3.94	5.31	1.93	0.98
IPSBUSZ	22.5	2705730	220	HP 7.13 - 17.00	8.82	21.38	29.13	3.54	18.50	4.57	7.28	-	0.98

\* Design Factor based on EN 13155 and ASME B30.20. † Profile A is the type of Holland Bulb (HP) style and size material.

